


R-Series Pushbuttons, Selector Switches



LED Pilot Light's Modular 22mm + 30mm

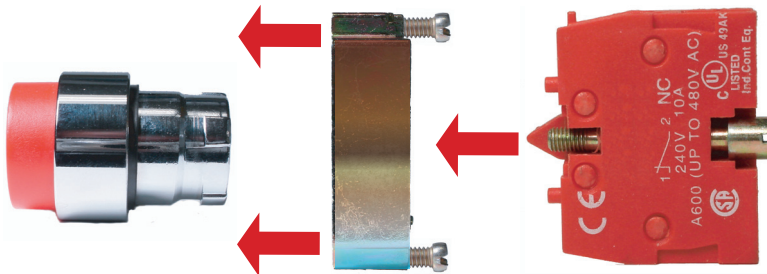

Metal Chrome Bezel **Steel Block Holder**
Included with operators **Bolt - On Contact Block**

A Secure + Safe System Versus Snap on Contacts



Pushbuttons

22 mm, NEMA 4, IP65



IEC 947-1


-13°, + 158°F Ambient Temp

Pushbuttons and Selectors
1 million mechanical Oper.
Emergency Stop
300,000 Operations

10 Amp, 600 Volt
A600, Q600

FEATURES

- High Gloss Chrome
 - Rugged Design
 - Very Bright LED's (22 & 30mm)
 - Modular Design
 - Secure Screw Mounting
 - Self Cleaning Contacts
 - Stackable Contacts
 - Positive Open Contacts
- Per IEC - 609 47 - Parts

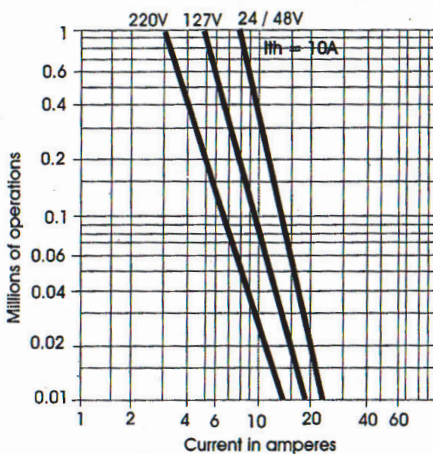

AC Ratings, Inductive - NEMA A600
35% Power Factor

Volts	Make Amperes	VA	Break Amperes	VA	Continuous carrying Amperes	Resistive 75% Power factor Make, Break & continuous Amperes
120	60	7200	6	720	10	10
240	30	7200	3	720	10	10
480	15	7200	1.5	720	10	10
600	12	7200	1.2	720	10	10

DC Ratings, UL Type Q600
Inductive and resistive Amps

Volts	Amps Make & Break	Amps Continuous
125	0.55	2.5
250	0.27	2.5
600	0.10	2.5

Minimum AC/DC 17 Volts, 25mA

