

POSITIVE GUIDED TYPE SH04 RELAYS AND TYPE LS07 CONTACTORS

Certified as Positive Guided
AEG Relays and Contactors

1. Independent Test Lab Certified per IEC 947-5-1
2. 100% Quality Tested per IEC 947-5-1


H.P. RATING					AMPS (OPEN) Resistive	Cat. No.	OPEN LIST	TYPE M1 NEMA1 LIST	TYPE 4X ▶ LIST	Auxiliary Contacts	
1 Phase		3 Phase								NO	NC
115V	230V	208V	230V	460V							
AC OPERATED MINI CONTACTOR TYPE LS07											
With Pressure Wire Screw Terminals											
1	2	3	3	3	16A	LS07.10-	-★0 \$36	-★1 \$105	-★4X \$128	1	-
1	2	3	3	3	16A	LS07.01-	-★0 36	-★1 105	-★4X 128	-	1
With Flat Plug (Spade) Connectors											
1	2	3	3	3	16A	LS07F.10-	-★0 \$36			NOTE: In Catalog No. .10 indicates 1-NO Contact; .01 indicates 1-NC Contact.	
1	2	3	3	3	16A	LS07F.01-	-★0 36				
CONTACT CODE		POWER N.O. N.C.		AUXILIARIES N.O. N.C.		SPADE CONNECTOR (Single or Double Spade) Check with factory for cost.					
LS07.10		3 -		1 -							
LS07.01		3 -		- 1							
LS07.22		2 2		- -							
LS07.40		4 -		- -							
DC OPERATED MINI CONTACTOR TYPE LS07											
3 Pole Non-Reversing											
With Pressure Wire Screw Terminals											
1	2	3	3	3	16A	LS07.10-	-★0 \$46				
1	2	3	3	3	16A	LS07.01-	-★0 46				
With Flat Plug (Spade) Connectors											
1	2	3	3	3	16A	LS07F.10-	-★0 \$46				
1	2	3	3	3	16A	LS07F.01-	-★0 46				

★COIL VOLTAGE SUFFIX			
AC★	60HZ	50HZ	DC★•
-A	120V	110V	-MSW 12VDC
-C	208/230V	220V	-NSW 24VDC
-D		380V	-OSW 48VDC
-E	480V	440V	-PSW 120VDC
-G	24V	22V	-RSW 220VDC
+ \$10 LIST for DC Coil			

• SW Single Winding DC Power Plant

▶ **TYPE 4X ENCLOSED STARTERS.** Type XLS starters are UL/CSA Listed starters enclosed in type 4X U.L. Listed enclosures. Type 4X enclosures are designed for outdoor/hose down/dust tight applications and are non-metal corrosion resistant.

DESCRIPTION		
<p>Minicontactor Type LS07, designed for motor control, and distinct <i>small</i> size. As such, they are recommended for space saving in industrial control, electronic control and distribution systems.</p> <p>The Type LS07 Minicontactor has been proven dependable on both three phase and single</p>	<p>phase systems when controlling motor loads. LS07 is particularly recommended for metal and woodworking machines, for textile and construction machinery and other commercial and industrial applications.</p> <p>Other loads for minicontactors are resistive, such as heating and lighting circuits, or inductive loads repre-</p>	<p>sented by solenoid valves and clutch couplings.</p>

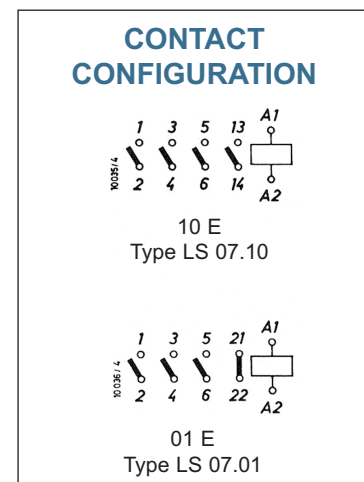

For TYPE LS05 - MINI Contactor, 20 Amp 600V, see LS05 Miniature Contactor System.